




## PRODUCT BRIEF

Intel® Desktop Board DH67GD  
Media Series



MicroATX Form Factor

# Intel® Desktop Board DH67GD Media Series

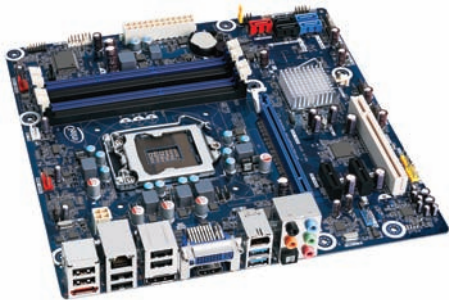

### Supports the 2nd-generation Intel® Core™ processors in the LGA1155 package

The Intel® Desktop Board DH67GD is based on the Intel® H67 Express Chipset and supports the 2nd-generation Intel® Core™ processors, including the Intel® Core™ i7 and Intel® Core™ i5 processors and other Intel® processors in the LGA1155 package. The 2nd-generation Intel Core processors feature optimized Intel® Turbo Boost Technology<sup>1</sup> and enhanced Intel® Hyper-Threading Technology<sup>2</sup>, which provide smarter performance and a seamless visual experience.

### Dual independent display for processors with Intel® HD Graphics

The Intel Desktop Board DH67GD is equipped with DVI-I, HDMI\* and DisplayPort\* connectors and supports flexible dual independent display for processors with Intel® HD Graphics. Powered by the 2nd-generation Intel Core processors with Intel HD Graphics, the Intel Desktop Board DH67GD delivers a superb visual performance for sharper images, richer color, and

lifelike audio and video. Enjoy a rich, immersive, liquid-smooth visual experience on your monitor or HDTV.

The Intel Desktop Board DH67GD also supports Intel HD Graphics with frequency tuning to maximize visual performance.

### Premium features

The Intel Desktop Board DH67GD offers premium features such as dual-channel DDR3 1333 MHz memory with four connectors (32 GB<sup>3</sup> max), Intel® Rapid Storage Technology for RAID 0, 1, 5, and 10, Intel® High Definition Audio<sup>4</sup> with 7.1 surround sound and multi-streaming capability, and an integrated Intel® PRO 10/100/1000 Network Connection in a low-power design.

The Intel Desktop Board DH67GD is designed with a wide range of 1.2 V to 1.8 V memory voltage control to maximize memory DIMM compatibility.

Two onboard SATA Revision 3.0 ports promise a new level of performance with

6.0 Gb/s link speed between storage devices and the host.

Two back panel SuperSpeed USB 3.0 ports address the needs of higher performance connections between the PC and increasingly sophisticated peripherals by offering a higher transferring rate of 5.0 Gb/s.

Legacy features such as a PCI connector provides backward compatibility for peripherals.

### Intel® Rapid Storage Technology

The Intel Desktop Board DH67GD features Intel Rapid Storage Technology and supports RAID 0, 1, 5, and 10. Intel Rapid Storage Technology provides new levels of protection, performance, and expandability for desktop platforms. Whether using one or multiple hard drives, users can take advantage of enhanced performance and lower power consumption. When using more than one drive, users have additional protection against data loss in the event of a hard drive failure.



## Intel® Desktop Board DH67GD Media Series

### The boxed Intel® Desktop Board DH67GD solution includes:

- ATX / MicroATX compliant I/O shield
- SATA cables
- Board and back panel I/O layout stickers
- Quick reference guide
- Intel® Express Installer driver and software DVD



### Software included:

CAPABILITY	SOFTWARE INCLUDED:
Utilities	▪ Intel® Core Utilities Bundle <sup>5</sup>
	▪ Intel® Desktop Utilities
Productivity	▪ Laplink* PCmover Express*
Antivirus	▪ ESET* Smart Security 4 (45-day license)

# Intel® Desktop Board DH67GD Media Series

## Features and Benefits

- 1 Supports the 2nd-generation Intel® Core™ processors, including the Intel® Core™ i7 and Intel® Core™ i5 processors, and other Intel® processors in the LGA1155 package for exceptional performance
- 2 Intel® H67 Express Chipset PCH
- 3 Intel® Rapid Storage Technology for RAID 0, 1, 5, and 10
- 4 Dual-channel DDR3 with four connectors for 1333 / 1066 MHz memory support (32 GB<sup>3</sup> max): Supports 1.2 V to 1.8 V memory voltage control for maximum DIMM compatibility.
- 5 PCI Express\* 2.0 x16 graphics connector
- 6 Two PCI Express\* x1 connectors and one PCI connector
- 7 Two SATA 6.0 Gb/s ports and three SATA 3.0 Gb/s ports, with one port compatible with an eSATA extension
- 8 One eSATA 3.0 Gb/s port
- 9 Two SuperSpeed USB 3.0 ports: 5.0 Gb/s signaling rate for high-speed connections to peripherals.
- 10 Fourteen Hi-Speed USB 2.0 ports: Six back panel ports and eight additional ports via four internal headers.
- 11 Two IEEE 1394a ports : one back panel port and one via internal header.
- 12 Integrated Intel® PRO 10/100/1000 Network Connection for high speed and low power consumption
- 13 Ten-channel Intel® High Definition Audio<sup>4</sup> with multi-streaming capability: Features five stack analog audio ports, one optical S/PDIF out port, internal S/PDIF header and front panel audio header.
- 14 DVI-I + HDMI\*\*+DisplayPort\*: Supports dual independent display and allows for the most flexible display output for Intel processors with Intel® HD Graphics.
- 15 MicroATX Form Factor

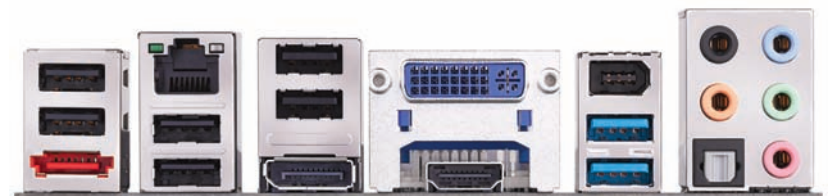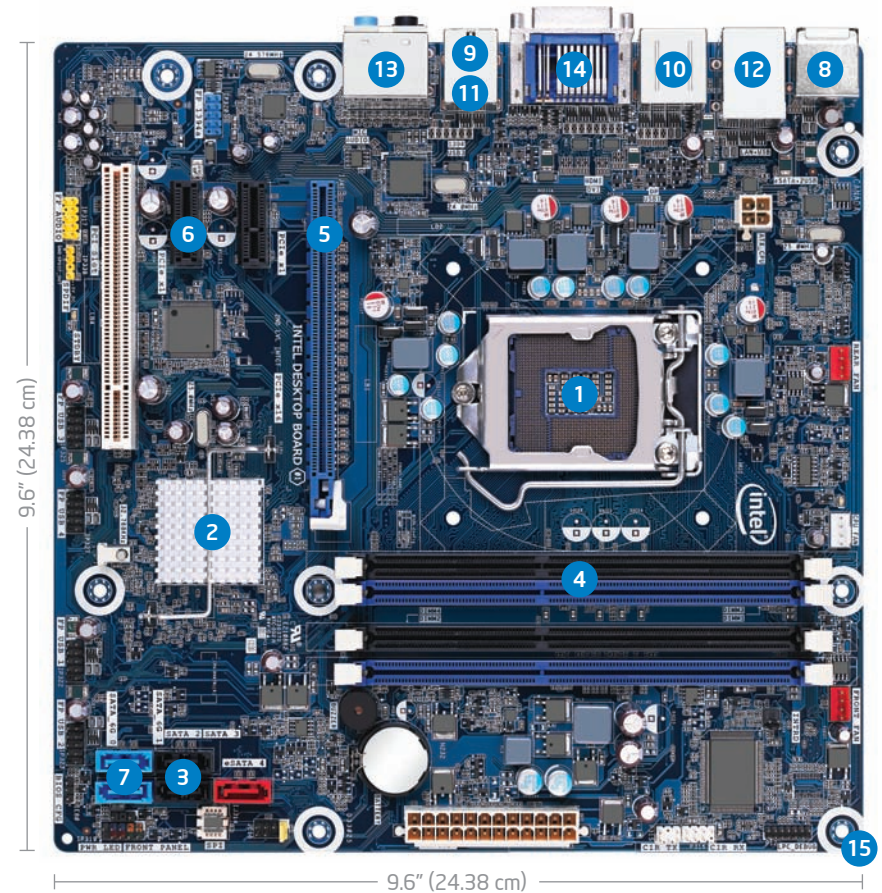

# Intel® Desktop Board DH67GD Media Series Technical Specifications

## PROCESSOR

### Processor Support

- Intel® Core™ i7 and Intel® Core™ i5 processors, and other Intel® processors in the LGA1155 package
- Supports Intel® 64 architecture<sup>6</sup>

## CHIPSET

### Intel® H67 Express Chipset

- Intel® 82H67 Platform Controller Hub (PCH)

### Peripheral Connectivity

- Two SATA 6.0 Gb/s ports
- Three SATA 3.0 Gb/s ports with one SATA port compatible with eSATA extension
- Two SuperSpeed USB 3.0 ports with 5.0 Gb/s link speed
- Fourteen Hi-Speed USB 2.0 ports (six back panel ports and eight additional ports via four internal headers)
- Two IEEE 1394a ports (one back panel port and one via internal header)

### System BIOS

- 32 Mb Flash EEPROM with Intel® Platform Innovation Framework for EFI Plug and Play
- Advanced configuration and power interface V3.0b, SMBIOS2.5
- Intel® Express BIOS update support

### Hardware Management Features

- Processor fan speed control
- Front and rear system chassis fan speed control
- Voltage and temperature sensing
- Fan sensor inputs used to monitor fan activity
- ACPI-compliant power management support

### Intel® PRO 10/100/1000 Network Connection

- Low-power design

### Expansion Capabilities

- One PCI Express\* 2.0 x16 connector
- Two PCI Express\* 2.0 x1 connectors
- One PCI connector

### Audio

- 7.1 + 2 multi-streaming Intel® High Definition Audio<sup>4</sup>
- Five stack analog audio ports and one optical S/PDIF out port
- Internal S/PDIF header and front panel audio header

### Video

- DVI-I + HDMI\*+DisplayPort\*: support dual independent display for Intel® processors with Intel® HD Graphics

## SYSTEM MEMORY

### Memory Capacity

- Four 240-pin DIMM connectors supporting up to four double-sided DIMMs
- Maximum system memory up to 32 GB using 8 GB double-sided DIMMs

### Memory Types

- DDR3 1333 / 1066 SDRAM memory support
- Non-ECC Memory
- Dual- or single-channel operation support

### Memory Voltage

- Memory voltage control from 1.2 V to 1.8 V
- 1.5 V standard JEDEC voltage

appropriate Intel® chipset and a motherboard with an appropriate codec and the necessary drivers installed. System sound quality will vary depending on actual implementation, controller, codec, drivers, and speakers. For more information about Intel® HD Audio, refer to [www.intel.com/design/chipsets/hdaudio.htm](http://www.intel.com/design/chipsets/hdaudio.htm)

<sup>5</sup> The Intel® Core Utilities Bundle includes Intel® Integrator Assistant, Intel® Integrator Toolkit, Intel® Express Installer, and Intel® Express BIOS Update.

<sup>6</sup> 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. See <http://developer.intel.com/technology/intel64/index.htm> for more information.

INFORMATION IN THIS DOCUMENT IS PROVIDED IN CONNECTION WITH INTEL® PRODUCTS. NO LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE, TO ANY INTELLECTUAL PROPERTY RIGHTS IS GRANTED BY THIS DOCUMENT. EXCEPT AS PROVIDED IN INTEL'S TERMS AND CONDITIONS OF SALE FOR SUCH

## JUMPERS AND FRONT PANEL CONNECTORS

### Jumpers

- Jumper access for BIOS maintenance mode

### Front-Panel Connectors

- Reset, HD LED, Power LEDs, power on/off
- Front-panel audio header

### Other Connectors

- Consumer IR emitter/receiver headers
- Chassis intrusion detect header

## MECHANICAL

### Board Style

- MicroATX

### Board Size

- 9.6" x 9.6" (24.38cm x 24.38cm)

### Baseboard Power Requirements

- ATX 12 V

## ENVIRONMENT

### Operating Temperature

- 0° C to +55° C

### Storage Temperature

- 20° C to +70° C

## REGULATIONS AND SAFETY STANDARDS

### United States

- UL 60950-1

### Canada

- CAN / CSA-C22.2 No. 60950-1

### Europe

- (Low Voltage Directive 2006 / 95 / EC)
- EN 60950-1

PRODUCTS, INTEL ASSUMES NO LIABILITY WHATSOEVER, AND INTEL DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY, RELATING TO SALE AND/OR USE OF INTEL PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT, OR OTHER INTELLECTUAL PROPERTY RIGHT.

Intel products are not intended for use in medical, life-saving, or life-sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

All products, dates, and figures specified are preliminary based on current expectations, and are subject to change without notice. Availability in different channels may vary. Actual Intel® Desktop Board may differ from the image shown. Intel, the Intel logo, and Intel Core are trademarks of Intel Corporation in the U.S. and other countries.

\* Other names and brands may be claimed as the property of others.

Copyright © 2010 Intel Corporation. All rights reserved.  
1010/FZ/ST/PDF 324496-001US

### International

- IEC 60950-1

### EMC Regulations (Class B)

- United States  
FCC CFR Title 47, Chapter I, Part 15, Subparts A / B

### Canada

- ICES-003

### Europe

- (EMC Directive 2004 / 108 / EC)
- EN 55022 and EN 55024

### Australia / New Zealand

- EN 55022

### Japan

- VCCI V-3, V-4

### South Korea

- KN-22 and KN-24

### Taiwan

- CNS 13438

### International

- CISPR 22

### Environmental Compliance

#### Europe

- Europe RoHS (Directive 2002/95/EC)
- WEEE (Directive 2002/96/EC)

#### China

- China RoHS (MII Order # 39)

<sup>1</sup> Intel® Turbo Boost Technology—maximum single-core turbo frequency (GHz). Intel Turbo Boost Technology requires a PC with a processor with Intel Turbo Boost Technology capability. Intel Turbo Boost Technology performance varies depending on hardware, software, and overall system configuration. Check with your PC manufacturer on whether your system delivers Intel Turbo Boost Technology. See [www.intel.com/technology/turboboost](http://www.intel.com/technology/turboboost) for more information.

<sup>2</sup> Intel® Hyper-Threading Technology requires a computer system with a processor supporting HT Technology and an HT Technology-enabled chipset, BIOS, and operating system. Performance will vary depending on the specific hardware and software you use. See [www.intel.com/info/hyperthreading](http://www.intel.com/info/hyperthreading) for more information.

<sup>3</sup> System resources and hardware (such as PCI and PCI Express\*) require physical memory address locations that can reduce available addressable system memory. This could result in a reduction of as much as 1 GB or more of physical addressable memory being available to the operating system and applications, depending on the system configuration and operating system.

<sup>4</sup> Intel® High Definition Audio requires a system with an

For ordering information, visit

[www.intel.com](http://www.intel.com)

For the most current product information, visit

<http://developer.intel.com/products/desktop/motherboard/>

