
Tandberg Data Corporation

Bar Code Label Specification

for LTO Ultrium
Cartridges

1004080-000 Rev C



Copyright

Copyright 2000 – 2007 by Tandberg Data Corporation. All rights reserved. This item and the information contained herein are the property of Tandberg Data Corporation. No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language or computer language in any form or by any means, electronic, mechanical, magnetic, optical, chemical, manual, or otherwise, without the express written permission of Tandberg Data Corporation, 2108 55th Street, Boulder, Colorado 80301.

Disclaimer

Tandberg Data Corporation makes no representation or warranties with respect to the contents of this document and specifically disclaims any implied warranties of merchantability or fitness for any particular purpose. Further, Tandberg Data Corporation reserves the right to revise this publication without obligation to notify any person or organization of such revision or changes.

Trademark Notices

Exabyte, the Exabyte Logo, EZ17, M2, VXA, and VXAtape are registered trademarks; ExaBotics, MammothTape, and SmartClean are trademarks; SupportSuite is a service mark. Linear Tape-Open, LTO, the LTO Logo, Ultrium and the Ultrium Logo are trademarks of HP, IBM, and Quantum in the US and other countries. All other product names are trademarks or registered trademarks of their respective owners.

Revision History

| Revision | Date | Description |
|----------|-------------|-----------------------|
| 000 | August 2000 | Initial Release |
| B | June 2004 | Update address |
| C | April 2007 | Converted to Tandberg |

Tandberg Data Corporation
2108 55th Street
Boulder, Colorado USA 80301

www.tandbergdata.com/us

Contents

| | |
|--|----------------|
| "About this Specification" | page 4 |
| "Symbology" | page 4 |
| "Bar Code Characters" | page 5 |
| "Encodation" | page 5 |
| "Quiet Zone" | page 5 |
| "Optical Specification" | page 6 |
| "Label Dimensions" | page 7 |
| "Volume Identifier Formats" | page 10 |

About this Specification

This document provides specifications for creating bar code labels used on cartridges in Tandberg Data LTO Ultrium libraries. The specifications are defined to both standardize labels and allow users the option of purchasing or printing their own labels. This specification contains the following information about the bar code labels:

- Symbology
- Bar code characters
- Encodings
- Quiet zone
- Optical specification
- Label dimensions
- Volume identifier formats

Symbology

The LTO Ultrium cartridge label uses the bar code symbology of USS-39. A description and definition of this symbology is available from the Automatic Identification Manufacturers (AIM) specification *Uniform Symbol Specification (USS-39)* and the *ANSI MH10.8M-1993 ANSI Barcode* specification.

Bar Code Characters

The bar code string consists of a start character, eight alphanumeric characters, and the stop character. Quiet zones precede and follow the start and stop characters. The first six characters may be any combination of upper case A through Z or 0 through 9 (for example, ABC123) to identify the cartridge volume. The last two characters are determined by the LTO Ultrium cartridge media type (for example "L" for LTO Ultrium and "1" for tape cartridge generation or drive manufacturer-unique identifier).

Only upper case alpha A through Z or numeric 0 through 9 characters are allowed.

Human readable characters may be used, provided there is not a conflict or interference with the automation code. The user specifies the format, colors, and location of the human readable characters.

Encodation

Refer to the *AIM Uniform Symbol USS-39* specification for the description and format of the start character, identifier characters, and stop character.

Quiet Zone

The quiet zones are the areas preceding the start and after the stop characters. They are clear of any printing or reflective properties that could cause spurious reflections. The quiet zones are further defined in the *AIM Uniform Symbol USS-39* specification.

Optical Specification

The optical specifications for the bar code labels are listed below.


- Use the white calibration standard to calibrate the print contrast of the Mcbeth PCMII. Be sure the filter select switch is on position A for all calibration and measurements.
- The reflectivity of the white background (RW) is the reflectivity measured in the center of narrow spaces using the Mcbeth PCMII print contrast meter. The RW must be between 70% and 85%. At this measurement, isolated print defects and edge roughness are avoided.
- A spot is defined as an area anywhere within the white background in which the reflectivity is less than 65%. Spots may not be greater than 0.004 inches (0.102 mm) enclosed diameter. There may be no more than five spots in the bar code area per label. Spots may not be any closer to each other than 0.01 inches (0.254 mm).
- The reflectivity of the black areas (RB) may be measured anywhere within any black area on the bar code. The print contrast signal (PCS) is defined as $(RW-RB)/RW$ and is measured using the Mcbeth PCMII print contrast meter. PCS must be a minimum of 0.85. Using the PCS measurement will avoid isolated print defects and edge roughness.
- A void is an area within a black area where the PCS is less than 0.85. No voids may be greater than 0.004 inches (0.102 mm) enclosed diameter. There may be no more than five voids in the bar code area per label. Voids may not be any closer to each other than 0.01 inches (0.254 mm).

Note: For additional optical requirements and measurement techniques, refer to the *AIM Uniform Symbol USS-39* specification.

Label Dimensions

The following figure shows the bar code label dimensions.

Note: Dimensions are given in inches with millimeters in parentheses.

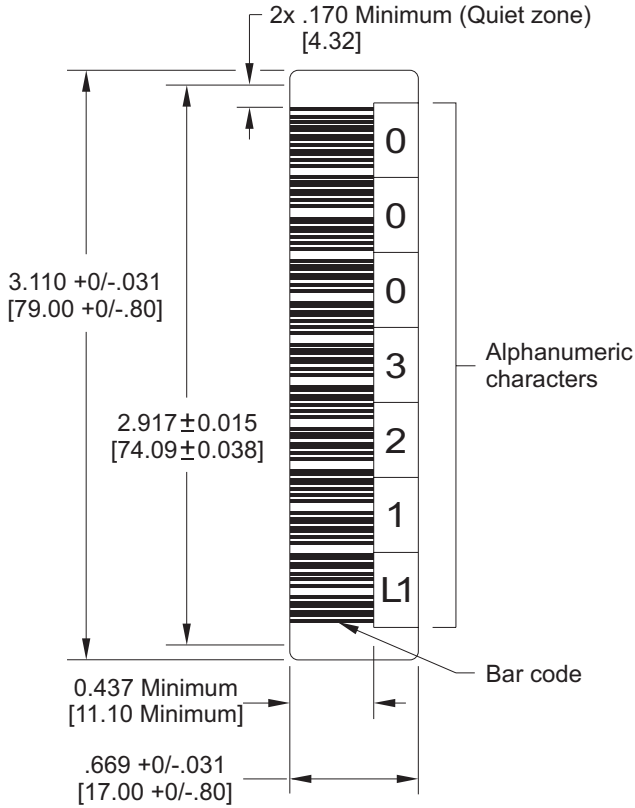

The following table lists the bar code label dimension specifications.

Note: The LTO Ultrium label dimensions are derived using the *AIM USS-39* specification.

| Specification | Dimension |
|--|---|
| Symbol height | 0.44 inches (11.1 mm) minimum as measured to the inside of the edge roughness ^a |
| Wide to narrow ratio | 1:2.75 |
| Narrow element width | 0.017 inches + 0.001/–0.003 inches (0.432 mm +0.03/–0.076 mm) |
| Nominal width of wide spaces and bars | 0.047 inches (1.188 mm) |
| Inter character gap | 0.017 inches +0.001/–0.003 inches (0.432 mm +0.03/–0.076 mm) |
| Bar code element width maximum | Measured to the outside of the edge roughness ^a . Space width is then the distance between bar maxima. |
| Quiet zone at the beginning and end of printed bar code string | 10× narrow width = 0.17 inches (4.32 mm) |
| Total bar code string length, including quiet zones | Nominal 2.917 inches (74.088 mm) |
| Bar code string direction | May be printed in either direction on the label but must begin/end with a valid start/stop character (*) |
| Edge roughness ^a | 0.0015 inches (0.038 mm) maximum |
| Tolerances | 0.XXX ± 0.005 inches, 0.XX ± .0.03 inches) (0.XXX ± 0.127 mm, 0.XX ± 0.762 mm) |
| Variation between all wide bars, white and black | Less than ± 0.0015 inches (0.0381 mm) |
| Variation between all narrow bars, white and black | Less than ± 0.0015 inches (0.0381 mm) |

| Specification | Dimension (Continued) |
|--|--|
| Print side | Print the bar code string on the label so it is on the side of the label towards the hub |
| Label stock dimensions | 3.110 x 0.669 inches (79 x 17 mm) ^b |
| Minimum length for quiet zones, start-stop and data characters | Nominal 2.917 inches (74.088 mm) |
| Minimum width | No less than 0.059 inches (1.5 mm) narrower than the cartridge label recess width |
| Corner cut | 0.059 inches (1.5 mm radius) |

^a The edge roughness is defined as the transition encountered as a horizontal line is moved vertically from all black to all white. The bar code edge is defined as the edge of all printed area attached to the bar.

^b Must fit within the label recess on the face of the cartridge without curling up on the sides or ends.

Volume Identifier Formats

The volume identifier only uses ASCII characters A through Z (41h-5Ah), 0 through 9 (30h-39h), and the combinations of “CLN” and “DG{space}” as described below.

- The prefix “CLN vnn L1” is reserved for cleaning cartridges. The “ v ” field is an alphanumeric field to identify a drive-unique cleaning cartridge. The “ nn ” alphanumeric field is used to track individual cleaning cartridge activity (for example, usage and life). When the drive requires cleaning, it will request loading of the unique type cleaner cartridge.
- Diagnostic/Service cartridges use the prefix “DG{space} vnn L1”. The “ v ” field is an alphanumeric field to identify a drive-unique diagnostic cartridge, if required. The “ nn ” alphanumeric field identifies a specific diagnostic cartridge volume.
- The volume identifier field consists of six left-justified alphanumeric characters as specified in *SCSI-3 Medium Changer Commands (SMC) ANSI NCITS 314-199X*.
- The media identifier characters “Lg” are controlled characters. The “L” designates the LTO Ultrium type of cartridge. The next character “g” (alphanumeric) designates the generation of the LTO Ultrium cartridge.

End of document