




3ware® 9690SA High-Performance Serial Attached SCSI (SAS) RAID Controller

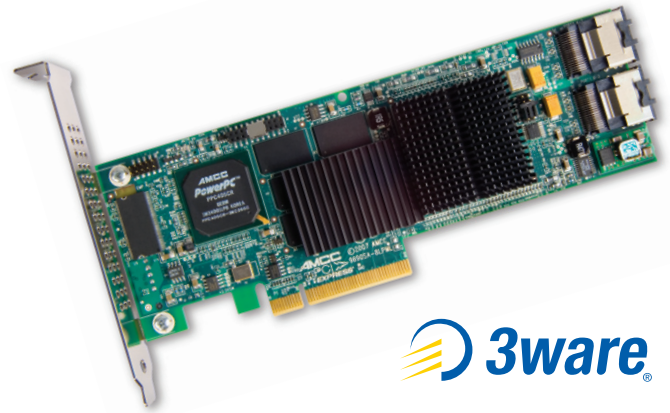

Highlights

- Scalable to 128 SAS and/or Serial ATA devices
- PCI Express x8 host interface
- Configuration flexibility with four configuration options
 - 8 internal ports
 - 8 external ports
 - 4 internal/four external ports
 - 4 internal ports
- SAS, SATA, and SATA II features, including 3Gb/s and NCQ
- 512MB DDR2 533 fixed memory
- Simultaneous double parity generation to maximize RAID 6 performance
- StorSwitch™ 8th generation non-blocking switch fabric for maximum controller throughput
- StreamFusion optimizes I/O accesses to maximize application performance under multiple stream loads
- StorSave BBU with write journaling optimizes data protection and performance; remote battery support
- Low-profile form factor
- RAID levels 0, 1, 5, 6, 10, 50, and Single Disk

AMCC's 3ware 9690SA SAS/SATA hardware RAID controllers deliver industry-leading RAID 6 and RAID 5 performance, expanded scalability, robust fault tolerance, and multi-terabyte capacities. A PCI Express host interface, StorSwitch™ architecture and sophisticated SAS and SATA II features drive this unrivaled performance.

It's Time for SAS

3ware pioneered the way for SATA and now capitalizes on time-proven serial storage expertise to take users from SCSI to SAS. The 9690SA seizes the moment to enter the market just as SAS hard drives, expanders and backplanes are more widely available and as enterprise infrastructures align to realize the potential of Serial Attached SCSI. As SAS makes inroads into the SCSI market, users will look to SAS to provide expanded connectivity and greater scalability and to the 3ware 9690SA for peace of mind.

The RAID 6 Difference


RAID 6 eliminates the risk of data loss if a second hard disk drive fails while the RAID array is rebuilding. Uniquely, in the 3ware RAID 6 implementation, two sets of parity are simultaneously calculated, written, and rotated across all the drives. This second parity calculation enables the array to survive up to two drive failures without losing data, significantly improving fault tolerance. The 3ware RAID 6 double parity algorithm maximizes RAID 6 throughput, so that the 9690SA controllers deliver unequaled RAID 6 write performance.

Connect, Expand, Protect with SAS

End users will enjoy configuration flexibility with four low profile PCI Express controller options: eight internal ports, eight external ports, four internal/four external ports, or four internal ports. Compatibility with industry standard SAS expanders will maximize scalability. Each 9690SA SAS controller scales to support 128 SAS and/or SATA devices.

Enterprise-class RAID Storage

SAS is the preferred interface for the direct-attach server space, SCSI's former mainstay. SAS is for mission critical applications that require higher levels of availability and native expansion. SAS is optimized for the random performance requirements of the data center. The 9690SA's advanced RAID features, SAS connectivity, and powerful 3ware performance architecture make it the ideal SCSI controller replacement.

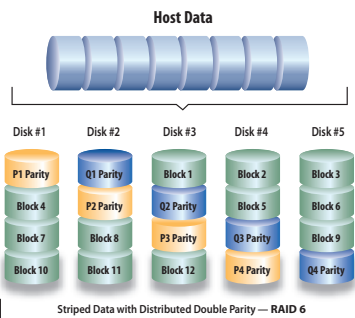

RAID 6: Two sets of parity data, P + Q, are striped across disks. RAID 6 safeguards against data loss during rebuild mode by allowing up to two consecutive drive failures for maximum fault tolerance.



APPLICATIONS FOR 3WARE CONTROLLERS



Servers



Security/
Surveillance



Video
Editing



Super
Computing



NAS



Video
On-Demand



Pro
Audio



Disk-to-Disk
Backup

3ware 9690SA

3ware 9690SA Features

- 8th-generation StorSwitch™ non-blocking switched architecture
- On-board I/O RISC processor and RAID offload provides true hardware RAID
 - SCSI device driver model to take advantage of SAS or inexpensive Serial ATA drives
- Bootable array support for greater fault tolerance of your OS
- Variable stripe size for performance tuning by application
- Support for greater than 2TB volumes
- 512MB DDR2 533 memory with ECC protection
- 128 max disk drives via SAS expanders
- Complete configuration management suite
 - 3ware BIOS Manager (3BM) – easy to use BIOS configuration tool
 - 3ware Disk Manager 2 – browser-based management tool
 - Command Line Interface (CLI) – scriptable configuration tool
- SNMP support
- SMTP support for email/pager notification
- Staggered drive spin-up support
- Auto carving allows LUNs > 2TB to be divided into multiple units for legacy operating systems limited to 2TB max. per LUN
- Battery Backup Unit (BBU) with remote battery support
- Write journaling for improved performance and data protection against accidental drive removal
- Multiple SAS/SATA RAID sets
- Multiple logical unit sizes and RAID levels on one card
- Hot-swap and hot-spare support for data availability
- Dynamic sector repair for robust data protection
- S.M.A.R.T. disk drive monitoring for reliability
- Emergency Flash Recovery protects against failed firmware upgrade
- Drive activity LED support
- Array/Drive Status and drive identification LED support
- Enclosure management via I²C and SES 2.0
- Drive insertion and removal notification
- Online Capacity Expansion and RAID Level Migration
- RoHS 6 of 6 and WEEE compliant

Operating System Support

- Microsoft® Windows® Vista/2003/XP, Red Hat Linux, SuSE Linux, Fedora Linux, 2.4 Linux kernel, 2.6 Linux kernel, FreeBSD; 32/64-bit driver support for Windows, Linux and FreeBSD
- For complete OS listing, go to: www.3ware.com/support/OS-support

3ware 9690SA Specifications

- Low profile form factor
- PCI Express x8 configurations, PCI Express 1.1 compliant
- Serial Attached SCSI (SAS) 1.1 specification support
- SATA 2.6 specification support
- BIOS PnP (plug and play) and BBS (BIOS boot specification) support
- Operating Temperature
 - Controller: 0°C to 50°C
 - BBU: 10°C to 40°C
- Power Requirements 18W maximum
- Dimensions

9690SA-8I	7.60"L x 2.73"H (19.30cm L x 6.93cm H)
9690SA-8E	7.80"L x 2.73"H (19.80cm L x 6.93cm H)
9690SA-4I4E	7.25"L x 2.73"H (19.30cm L x 6.93cm H)
9690SA-4I	7.60"L x 2.73"H (19.30cm L x 6.93cm H)

Service and Support

- 3-year warranty
- Support via the web at www.3ware.com/support
- For latest motherboard and hard drive compatibility listing go to: www.3ware.com/products//sys_compatibility.asp

Accessories

- BBU-MODULE-04 Battery Backup Unit
- BATT-SPARE-02 Replacement battery for BBU-MODULE-04
- CBL-SFF8087-05M (0.5m Multi-lane internal cable)
- CBL-SFF8087-06M (0.6m Multi-lane internal cable)
- CBL-SFF8088SAS-10M (Universal key external cable, 1m)
- CBL-SFF8088SAS-20M (Universal key external cable, 2m)
- CBL-SFF8088IB-10M (Legacy external cable, 1m)
- CBL-SFF8088IB-20M (Legacy external cable, 2m)

3ware 9690SA Series Selection Guide

	9690SA-8I	9690SA-8E	9690SA-4I4E	9690SA-4I
Form Factor	Low profile	Low profile	Low profile	Low profile
SAS Ports	8 Internal	8 External	4 Internal/4 External	4 Internal
Drive Interface	SAS and SATA	SAS and SATA	SAS and SATA	SAS and SATA
PCI Express	x8	x8	x8	x8
RAID Levels	0, 1, 5, 6, 10, 50, Single Disk	0, 1, 5, 6, 10, 50, Single Disk	0, 1, 5, 6, 10, 50, Single Disk	0, 1, 5, 6, 10, 50, Single Disk
Onboard Memory	512MB DDR2 533	512MB DDR2 533	512MB DDR2 533	512MB DDR2 533
Connector Type	SFF-8087 mini-SAS	SFF-8088 mini-SAS	SFF-8087/SFF-8088 mini-SAS	SFF-8087 mini-SAS
BBU with Remote Battery Support	Yes	Yes	Yes	Yes



AMCC reserves the right to make changes to its products, or to discontinue any product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied upon is current.

AMCC is a registered trademark of Applied Micro Circuits Corporation. 3ware, SwitchedRAID and 3DM are registered trademarks in the United States and StorSwitch is a trademark in the United States, of Applied Micro Circuits Corporation. All other trademarks are the property of their respective holders. Copyright © 2007 Applied Micro Circuits Corporation. All Rights Reserved. DS9690SA_031408



3waresales@amcc.com
www.3ware.com
www.amcc.com

Sales Offices for 3ware Products:

USA: +1-877-883-9273
+1-408-542-8771
Europe: +44-1494-890700
Asia/Pacific: +65-6826-3381
China: +86-10-6581-4916